

RVAZ4

Valve actuator for 0...10V or 3-position control

RVAZ4 is a range of valve actuators for control of Regin's zone valves in the ZTV/ZTR range. Force 400 N.

- 3-position or 0...10 V control signal
- 24 V AC supply voltage
- Manual manoeuvring

All the valve actuators in the RVAZ4 range can be used together with valves in the ZTV/ZTR range. They are easy to mount and have a clear position indication which shows the position of the actuator.

The actuator has manual manoeuvring.

Models for every need

RVAZ4 is available in two different models:

RVAZ4-24A

0...10 V control, 24 V AC supply voltage

RVAZ4-24

3-position control, 24 V AC supply voltage


Manual manoeuvring

The spindle position can, after cutting the supply voltage, easily be manually adjusted without using any tools. Simply press down the disengagement button and turn the knob until reaching the desired position.

Position indication

The actuator position is shown by a 0...100 % scale indicator on the knob for manual manoeuvring.

See the picture below.

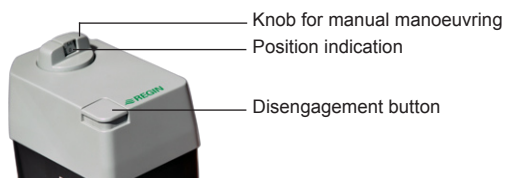

- Easy to mount on the valve
- Stroke 5.5 mm
- Position indication


High functional reliability

The actuator is short-circuit proof and protected against polarity reversal when connected.

Simple installation on the valve

The actuator is mounted on the valve using the connection nut, manual power is sufficient.

It should be mounted so that the drive rod is within 85° from the vertical line and the motor housing is on top.



Models

RVAZ4-24A	0...10 V DC control, 24 V AC supply voltage
RVAZ4-24	3-position control, 24 V AC supply voltage

Technical data

	RVAZ4-24A	RVAZ4-24
Supply voltage	24 V AC \pm 15 %	24 V AC \pm 15 %
Control signal	0...10 V DC	3-position
Stroke time	30 s	121 s


Common data

Power consumption	Max. 6 watts
Stroke	5.5 mm
Force	400 N
Ambient temperature	0...50°C
Media temperature	1...110°C
Storage temperature	-10...+80°C
Ambient humidity	Max. 95 % RH
Protection class	IP44




This product conforms to the EMC requirements in the European harmonised standards EN60730-1:2000 and EN60730-2-8:2002 and carries the CE mark.

Wiring

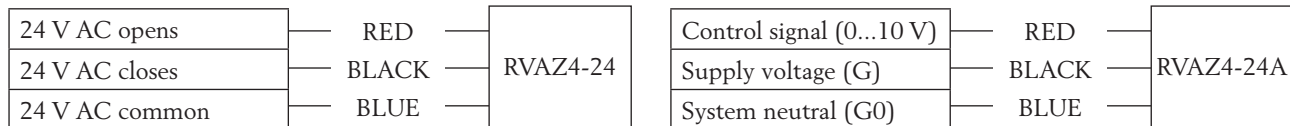

Dimensions

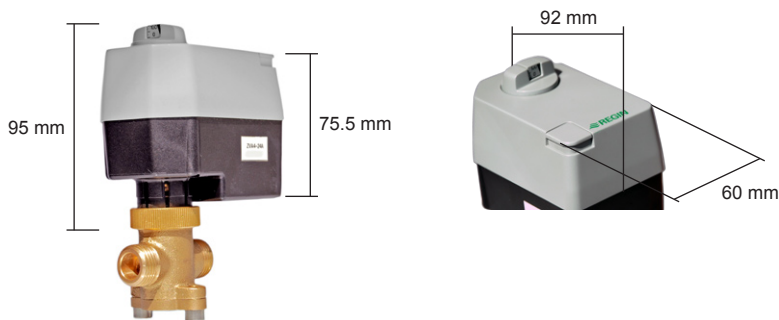

Product documentation

Document	Type
Product sheet ZTV/ZTR	Information about zone valves intended for use together with RVAZ4
Instructions RVAZ4-24 and RVAZ4-24A	Instructions for the RVAZ4 actuators

The product documentation is available for download from Regin's homepage, www.regin.se.

Head Office Sweden

Phone: +46 31 720 02 00
 Web: www.regin.se
 Mail: info@regin.se

Sales Offices

France: +33 14 171 46 46
 Germany: +49 30 77 99 40
 Spain: +34 91 473 27 65
 Hong Kong: +852 24 07 02 81
 Singapore: +65 67 47 82 33



THE CHALLENGER IN BUILDING AUTOMATION